





Item	项目	Specification 规格值
No. of conductors	导体芯线 N	28
Pitch	间距 P	0.5 ± 0.05
Total Pitch	全间距 PT	13.5 ± 0.07
Total Length	总长度 L	200 ± 3
Insulation Length	绝缘胶长度 IL	192 ± 3
Margin width	边缘宽度 M	0.5 ± 0.07
Total width	总宽度 W	14.5 ± 0.07
Strip length	线口长度 S1	4 ± 1
Strip length	线口长度 S2	4 ± 1
Reinforeing tape length	补强板长度 B1	8 ± 2
Reinforeing tape length	补强板长度 B2	8 ± 2
Slanting	线口倾斜度 A	≤ 0.3
Over lap	冲孔	≤ 0.5
Terminal thickness	插入厚度 t	0.303 ± 0.05
Thickness insulation	线身厚度 t1	0.121 ± 0.05
Conductor thickness	导体厚度 Ct	0.035 ± 0.005
Conductor width	导体宽度 Cw	0.3 ± 0.03
Supporting Tapc Color	补强板颜色	蓝 (Blue)
PET(Supporting Tapc spcc)	补强板规格	0.225mm
PET(Insulation)	绝缘胶规格 印字	0.043mm
PET(Insulation)	绝缘胶规格 白色	0.043mm
Rev	版本	A

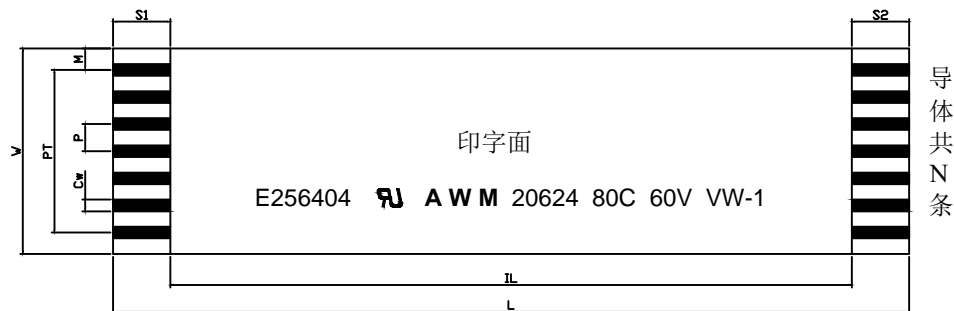

Storage condition (储存条件): Recommended (推荐)

Temp: 15° C ~ 25° C (温度 15° C ~ 25° C) Humidity: 30 ~ 60RH% (湿度 30 ~ 60RH%)



Title		0.5mm FFC CABLE C TYPE 28P L=200mm UL20624 60V 80°C					
Tolerances	Drawer	Naomi	Part No:				
	Linear	Checked	Summer	WCT-TZ17-00473			
X ±0.15 .X ±0.05	Approved	Macus	Cus. Part No:				
	Date	2017.06.07	WCT-TZ17-00473				
Angles	Projection	Version	Size	A4	Units	mm	
± 3°		A	Scale	1:1	Sheet	1/1	