



1.MATERIAL:

INSULATOR: Hi-TEMPERATURE PLASTIC,UL 94V-0,
COLOR"BLACK
TERMINAL: COPPER ALLOY,
SHELL: STAINLESS STELL,


2.PLATING:

TERMINAL: GOLD FLASH PLATING ON ALL TERMINAL,
AND 50u" min NICKEL UNDERPLATED ON ALLOVER,
SHELL:50u" NICKEL UNDERPLATED ON ALLOVER, GOLD FLASH
ON SOLDER PAD

3.SPECIFICATIONS




INSULATION RESISTANCE: 1000M min.AT DC 500V DC
WITHSTANDING VOLTAGE: 250V ACrms FOR 1 MINUTE
CONTACT RESISTANCE: 100mΩ max. AT 10mA/20mV max
CURRENT RATING: 0.5A
VOLTAGE RATING: 5.0 vrms
OPERATING TEMP.RANGE:-40° C+70° C
MATING CYCLES: 5000 INSERTIONS

4.PACKAGE:1250PCS/REEL, 15000PCS/CARTON




Gold Finger is on the bottom side

MICRO SIM CARD	
PIN NO.	DESCRIPTION
P1	VCC
P2	GND
P3	RST
P4	VPP
P5	CLK
P6	I/O
P7	RESERVED
P8	RESERVED

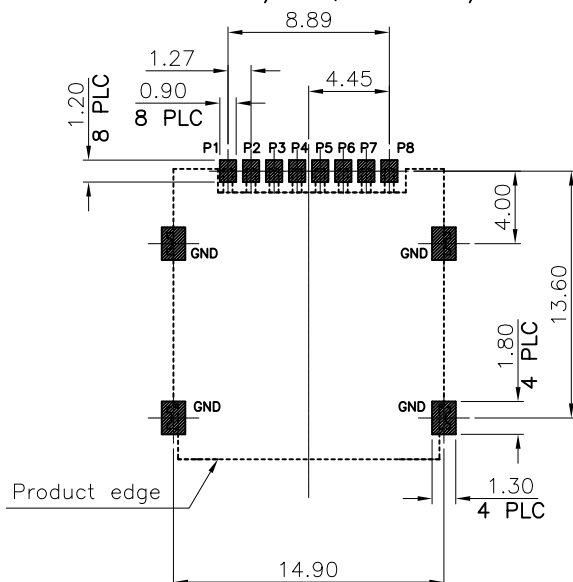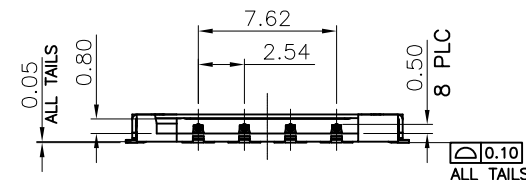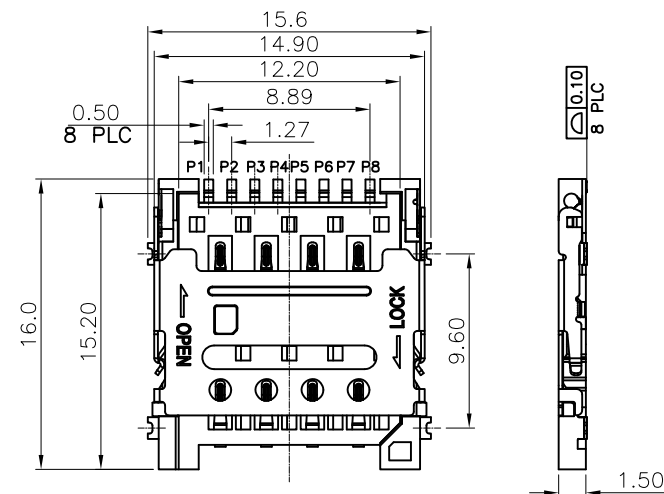

RECOMMENDED PCB LAYOUT(TOP VIEW)
GENERAL TOLERANCES:±0.05

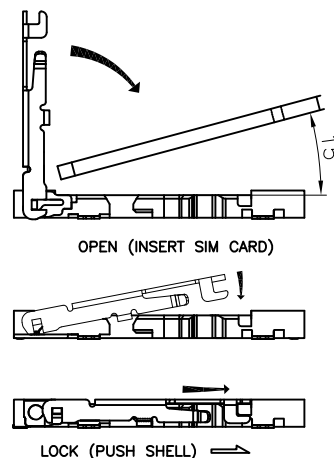

Title	micro sim hinge 1.50H type						
Tolerances	Drawer	Naomi	Part No:				
Linear	Checked	Summer	WCT-MSIM-H8P150H				
X ±0.15 .X ±0.05	Approved	Macus	Cus. Part No:				
Angles	Projection	Version	Size	A4	Units	mm	
± 3°		A1	Scale	1:1	Sheet	1/1	