
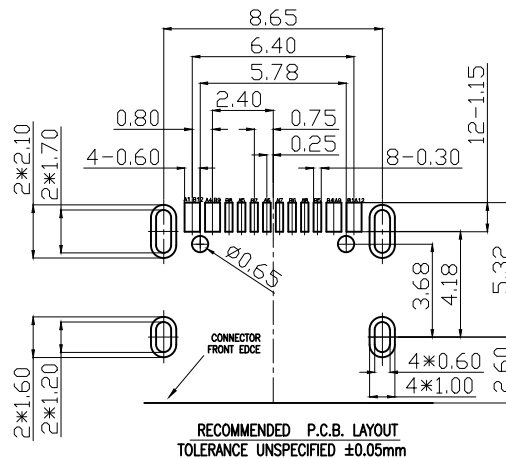
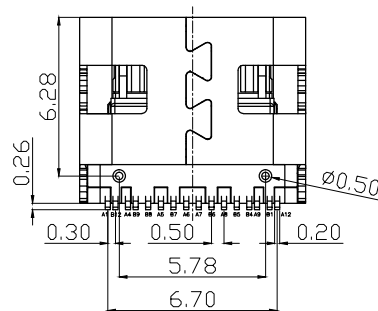

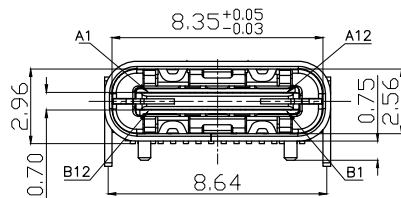




Material:

Insulation : LCP+30%G.F UL94V-0

Contact : Phosphor bronze T=0.12mm Gold Flash
Nickel Under plating Over All.

Shell : SUS T=0.30mm Ni 100u" or Sn 100u"

Electrical:

Current Rating : 0.5A

Contact Resistance : 30MΩ MAX

Insulation Resistance : 100MΩ MIN 250V DC

Dielectric Withstanding Voltage : 250V AC

Wetting Test : 250±5°C 5±0.5s

Mate Force : 3.57 KGF MAX

Unmate Force : 1.02 KGF MIN

Life Test : 10000 Cycles

Operating temperature : -30°C~+80°C



Title		USB TYPE C/F 90 Female 7.6 DIP+SMT 16P					
Tolerances	Drawer	Naomi	Part No:				
Linear	Checked	Summer	WCT-USBC-14HF21966CS3S5E				
X ±0.15 .X ±0.05	Approved Date	Macus 2017.06.30	Cus. Part No: WCT-USBC-14HF21966CS3S5E				
Angles	Projection	Version	Size	A4	Units	mm	
± 3°		A	Scale	1:1	Sheet	1/1	