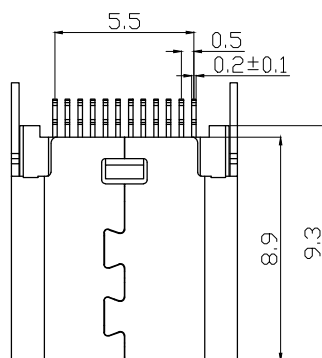



Material:

Insulation : LCP+30%G.F UL94V-0

Contact : C181401 T=0.12mm Gold Flash

Nickel Under plating Over All.

Shell : SUS T=0.30mm Ni 100u" or Sn 100u"

Earth Terminal : SUS T=0.10mm

Spring Piece : SUS T=0.15mm

Electrical:

Current Rating : 3.0A

Contact Resistance : 40MΩ MAX

Insulation Resistance : 100MΩ MIN 250V DC

Dielectric Withstanding Voltage : 100V AC

Wetting Test : 250±5°C 5±0.5s

Mate Force : 2.0 KGF MAX

Unmate Force : 0.8 KGF MIN

Life Test : 10000 Cycles

Operating temperature : -30°C~+80°C



允祿科技有限公司
WINCONN TECHNOLOGY CO., LTD.

Title		USB TYPE C/F 180 Clamp Board SMT Type				
Tolerances	Drawer	Naomi	Part No:			
Linear	Checked	Summer	WCT-USBC-14HF2246J2S3S5E			
X ±0.15 .X ±0.05	Approved Date	Macus 2017.06.29	Cus. Part No: WCT-USBC-14HF2246J2S3S5E			
Angles	Projection	Version	Size	A4	Units	mm
± 3°		A	Scale	1:1	Sheet	1/1